

## How to read the model numbers

U R D - 120 R M F C - TH

①

②

③

④

⑤

⑥

⑦

⑧

### ① Series

ARD = Inverter control upright type(depth800mm)  
ARN = Inverter control upright type(depth650mm)  
URD = Upright type(depth800mm)  
URN = Upright type(depth650mm)  
UQD = High-humidity Upright chiller  
AYC = Inverter control table type(depth600mm)  
AYN = Inverter control table type(depth660mm)  
AYW = Inverter control table type(depth750mm)  
YRC = Table type(depth600mm)  
YRN = Table type(depth660mm)  
YRW = Table type(depth750mm)  
LGU = Glass door cabinet(depth450m)  
LGC = Glass door cabinet(depth600m)

### ② Width

06 = width 610mm  
09 = width 900mm  
12 = width 1200mm  
15 = width 1490mm(Upright Refrigerator)  
width 1500mm(Table Refrigerator)  
18 = width 1800mm

### ③ No. of freezer compartments

0 = Chiller compartments only  
1 = 1 freezer compartment  
2 = 2 freezer compartments  
3 = 3 freezer compartments  
4 = 4 freezer compartments

### ④ Temperature range

R = Chiller  
P = Freezer / Chiller  
F = Freezer  
W = Static Cooling chiller compartment

### ⑤ Interior material / Freon

M = Stainless steel E = Color steel  
X = CFC free

### ⑥ Specification

F = Center pillarless  
P = GN Pans  
P3 = GN Pans with drain evaporator

### ⑦ Model change number

### ⑧ The country basis power supply specification (the voltage)

TH = For Thailand (single-phase 220V/50Hz)

VI = For Vietnam , Indonesia

(single-phase 220V/50Hz)

HK = For Hong Kong (single-phase 220V/50Hz)

SI = For Singapore, Cambodia , Myanmar

(single-phase 230V/50Hz)

MA = For Malaysia (single-phase 240V/50Hz)

PH = For Philippines (single-phase 220V/60Hz)

TA = For Taiwan (single-phase 220V/60Hz)



## Safety precautions

- The products shown in this catalog are for indoor use. They should be used and stored in locations away from rain.
- Always carefully read the Operation Manual and Installation Manual prior to use to ensure proper usage.
- Installation and electrical wiring are required. Please consult the store where the product was purchased or a qualified professional.
- Do not place volatile, flammable materials such as ether, benzene, alcohol or lighter tanks in the cabinets. There is a danger of explosion.
- Please use for temporary storage of foods. Do not put medical products or research samples in the cabinets. Use for anything besides the intended purpose may cause problems such as a degradation of quality of the stored item.

# GALILEI

Be cool, Be alive.



### ■Fukushima Galilei (Thailand) Co., Ltd.

16 Asoke Court G Floor Room 2G, 1st Floor Room 1A, Sukhumvit 21 (Asoke) Rd., Klongtoey-Nua, Wattana, Bangkok 10110, Thailand  
Tel.66-02-258-3690

### ■Fukushima Galilei Singapore Pte. Ltd.

1003 Bukit Merah Central #02-06 Singapore 159836, Singapore  
Tel.65-6271-0460

### ■Fukushima Galilei Vietnam Co., Ltd.

Room 502 , 5th Floor, Zen Plaza building, 54-56 Nguyen Trai Street, Ben Thanh Ward, District 1 , Ho Chi Minh City, Vietnam  
Tel.84-28-3933-3628

#### [Hanoi Branch]

8F TID Center Building, 4 Lieu Giai Street, Cong Vi Ward, Ba Dinh District, Hanoi, Vietnam  
Tel.84-24-3755-6000

### ■Fukushima Galilei Malaysia Sdn. Bhd.

Lot 6.01 , 6th Floor Wisma Central, Box617 Jalan Ampang 50450 Kuala Lumpur, Malaysia  
Tel.60-3-2181-1034

### ■PT. Fukushima Galilei Indonesia

Ruko Wisteria 1 Lt.2 Jl. Panglima Polim No .7A, Melawai Kec.Kebayoran Baru, Jakarta Selatan 12160, Indonesia  
TEL. 62-21-2709-5619

### ■Fukushima Galilei (H.K.) Co., Ltd.

Unit 903, 9/F, Westlands Centre, 20 Westlands Road, Quarry Bay, Hong Kong  
TEL. 852-2885-5679

### ■Fukushima Galilei Philippine Corporation

Unit 919 One Park Drive Cor 11th Drive Cor 9th Ave BGC Fort Bonifacio Taguig 1634, Philippines  
Tel.63-02-8551-2292

### ■Fukushima Galilei Taiwan Co.,Ltd.

Rm. 5, 12F, No.112, Sec. 2, Zhongshan N. Rd., Zhongshan Dist., Taipei City 10449, Taiwan (R.O.C.)  
Tel.886-2-2521-9810

### ■Fukushima Galilei Cambodia Co., Ltd.

Executive Room #2-E6,The iCON Professional Building,216 Norodom Boulevard,Tonle Bassac,Chamkarmorn,Phnom Penh,Cambodia.  
Tel.855-92-407957

### ■Fukushima Galilei Myanmar Co. Ltd.

No.(262) , 12th Street Ngwe Kyar Yan 3 Quarter South Okkalapa Township, Yangon , Myanmar  
email address : myanmar@galilei.co.jp

### ■Fukushima Galilei (Shanghai) Co., Ltd.

Room B316, SIM Technology Building ,No.633 ,Jinzhong Road ,Changing District, Shanghai ,China  
TEL. 86-21-6248-1512

## GALILEI (THAILAND) CO., LTD.

60/105 Moo 3, Mabyangporn Sub-District, Pluakdaeng District, Rayong 21140, Thailand  
Tel.66-38-020-112



<https://www.galilei.co.th/en/home>



## FUKUSHIMA GALILEI CO. LTD.

### ■Head Office

2-6-18 Takejima, Nishi Yodogawa-ku, Osaka, Japan 555-0011  
Tel.81-6-6477-2051

Address inquiries and orders for products made by FUKUSHIMA GALILEI CO.LTD. to:



The contents of this catalog are valid as of September 2025.  
(2509-016) F

カタログNo.

ER K-92

# GALILEI

Be cool, Be alive.

2025 Edition

## Commercial Refrigerator

Refrigerated Display Cabinet / Ice makers / Blast chiller/Shock Freezer  
Food Processing machine / Patisserie & Bakery machine / FE clean water  
RO water machine

# Japan Quality



## Preventing refrigerant leaks to curb global warming!

10-year  
refrigerant gas leak  
warranty service

10年保証

Industry-first

# All models and products with plug-in refrigeration unit are now supported!\*

## Refrigerant leakage repair costs fully Warranted for 10 years

In April 2025, FUKUSHIMA GALILEI launched a full-fledged "10-year refrigerant gas leak warranty" that supports the servicing of refrigerant-gas-leak-caused cooling defects as long as 10 years. The warranty applies to GALILEI's "all plug-in models and products" \* equipped with refrigerant-gas fridge/freezer, from kitchen appliances (such as commercial refrigerators, ice makers and blast chillers) to medical and laboratory equipment. Stand-alone fridges/freezers are also fully covered for their refrigerant gas leak repair costs for 10 years, with separate maintenance contracts. This warranty helps to sustain the food supply chain.

\* Some models and areas excluded.  
For details, contact our sales staff.



### What are products with plug-in equipment?

The products have a plug-in refrigerator or freezer. Just plug them in a socket, and they will be up and running. There is no need for refrigerant piping and any other works. These products can also be readily moved.

\* Some models require plumbing and other works.



### Standard warranty reassures you

GALILEI products with plug-in refrigeration unit come as standard with the 10 year refrigerant gas leak warranty. There is no extra cost, nor special contracts. Your GALILEI products are in good hands.



### For environmental conservation

FUKUSHIMA GALILEI has been expanding the scope of products covered by the 10 year refrigerant gas leak warranty and providing reliable maintenance contracts. The eco-friendly GALILEI products are now lined up for more and more customers who are contributing to the protection of environment.



### Reduce opportunity loss leading to reduce food loss

Malfunctioning refrigerators and freezers go directly to food quality. Food deterioration means opportunity loss and then food loss. GALILEI engineers have been working on the development of equipment that are tough against refrigerant gas leakage, such as the adoption of higher corrosive resistant copper tubes and the significant reduction in brazing points.


\* Applicable to GALILEI's all models and products with plug-in fridge/freezer manufactured after April 2025 (some models excluded). Relevant products are marked "GX" on their model name labels. Vertical and horizontal commercial freezers and refrigerators as well as cube ice makers, which use the CFC-free refrigerant R1234yf, are already applicable since April 2024.  
\* Depending on the failure cause, method of use and ambient conditions, the product in question may not be covered by the warranty. For details, refer to the "Free Repair Policy" described in the accompanying Instruction Manual.

# New Models Released!

Improve your energy saving tremendously.

### \* All models of AR and AY series

- A specific microcomputer is integrated to upgrade our original control technique and energy-saving performance. What's more, the temperature display has been redesigned for easier readability.
- The internal fan motor and condenser fan motor are now DC-powered. This means the motor speeds can be well controlled for better power saving.

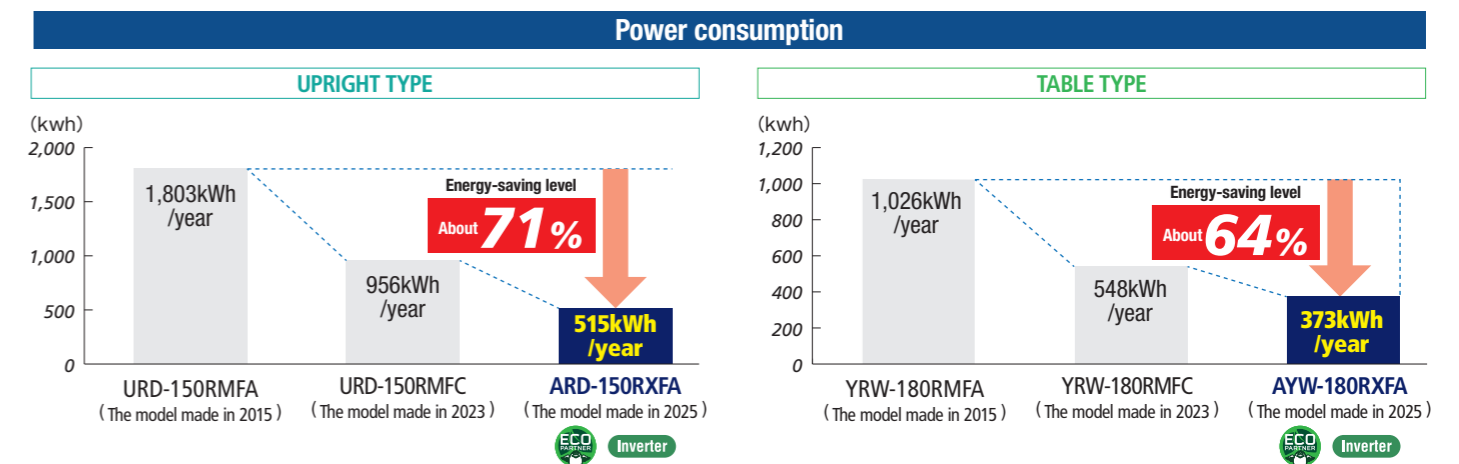

## Breakthrough "Green Refrigerant" fit for sustainable society.

Refrigerating cycle is applied to keep the inside of refrigerators cool. A refrigerant is a substance used in transferring heat in the refrigeration cycle. The refrigerants "CFCs/HFCs" and "HFCs" have been employed for many years, but they have been found to have an impact on global warming. Here comes the "Green Refrigerant". Focusing on the global warming potential (GWP), which is a numerical factor for the degree of environmental impact, "R404A" (on of the HFCs) indicates 3920, while the green refrigerant "R1234yf" marks only 1. This newcomer is just groundbreaking and promising for sustainable society.\*1 First in the industry, FUKUSHIMA GALILEI has adopted the highly safe, mildly flammable refrigerant "R1234yf" for commercial refrigerators.\*2

### What is R1234yf?

"R1234yf" is a refrigerant that is mildly flammable and non-toxic and has zero ozone depletion potential and a GWP1 rating.\*3 Natural refrigerants "R600a (isobutane)" and "R290 (propane)" are also environmentally friendly. Because of their high flammability, however, these substances require strict safety precautions. Compared to these natural refrigerants, "R1234yf" is known to be much easier to handle and safer.\*4 Its another advantage is for you to readily inspect repair your refrigerating systems on site.

GWP comparison		0	500	1,000	1,500	2,000	2,500	3,000	3,500	4,000
CFCs used in conventional models	R404A									3920
	R410A									2090
	R134a									1430
CFCs used in current models	R448A									1387
	R1234yf									1
[Reference]										
Highly flammable non-CFCs	R290									3.3
	R600a									20

\*1: R1234yf has been announced by the Ministry of Economy, Trade and Industry as eco-friendly refrigerant that replaces HFCs.

Quoted from "February 2023, Ministry of Economy, Trade and Industry, Trends in CFCs Control".

\*2: As of August 2023, according to our research.

\*3: GWP figures are quoted from IPCC Fourth assessment report in 2007.

\*4: The Japan Refrigeration and Air Conditioning Industry Association GL-21/GL-23.



## Three points in adopting Green Refrigerant "R1234yf"

**Point. 1** Environmentally conscious

Compared to HFCs used in conventional products, the new refrigerant significantly reduces the impact on global warming.

**Point. 2** Mildly flammable and safe

Compared to similar non-CFC "highly flammable refrigerants", the refrigerant has a lower risk of fire hazard and can be handled safely.

**Point. 3** Easy to manage

The refrigerant is safe while checking and repairing your systems on site.

# Quality, Design and Innovation

As research results of power-save performance, the fridges and freezers are gentle to the environment and kitchens alike. All the models are equipped with ground-fault circuit interrupter for added safety. Being obsessed by user-friendliness, their designs live up to your expectations.

## Corrosion resistance and durability

### The interior and exterior component parts are of stainless steel prepared in Japan

The doors, front and side panels inside and out (top panel with horizontal models) are also of made-in-Japan stainless steel. Those highly anti-corrosive and durable component parts serve you for many years to come.



UPRIGHT TABLE

## Energy-saving performance

### New-type microprocessor introduced

Own control system has been developed to save energy and speed up cooling. The rotating speeds of the condenser fan and internal fan are optimally controlled for more energy-saving rate.



UPRIGHT

### Reconfigured door frame throat for better energy-saving performance

The door frame throat, which rises along behind the door frame, helps save power.




UPRIGHT TABLE

## Energy-saving performance

### Self-closing doors

The doors get automatically closed without having to check their tight shutting. This feature prevents the temperature inside from rising.

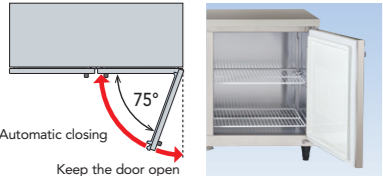

UPRIGHT TABLE

### Thanks to the brand-new highly-efficient evaporator, more power can be saved

The high-efficiency internally grooved piping, on the other hand, enlarges the cooling surface. In this way, the thermal exchange efficiency is improved to achieve a higher energy-saving factor.




Cross-section view of the internally grooved pipe

UPRIGHT TABLE

### Optimum control of the body frame heater

The current-carrying rate of the window frame heater is variably controlled, which intends to save energy further.

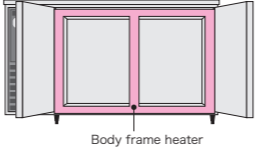

UPRIGHT TABLE

## Safeness

### Standard equipped with ground-fault circuit interrupter

All the models are standard equipped with this safety device.



UPRIGHT TABLE

## Workability and maintainability

### Reshaped door packing

The door packing has been redesigned from double to triple construction. By so doing, less cold air leaks out and saves cooling-requiring power.



The fit-in feature permits you to clean and replace it easily. Without grooves and recesses, the packing is user-friendly and hygienically superior.

UPRIGHT TABLE

### Freezing circuitry provided with charge ports

The freezing circuitry of all the models is provided with charge ports. These ports are intended to easily recover and fill up refrigerant in servicing.



UPRIGHT TABLE

## Workability and maintainability

### Mechanical compartment panel holding function for easier condenser filter clean-up and other routine servicing jobs

The hinged shaft of the mechanical compartment panel is designed to slide, allowing you to carry on servicing jobs with the panel fixed open.



UPRIGHT

### Modular construction for easier servicing

After our engineering review, the current panel structure sucks air from front bottom and blows it out from front top, which makes for optimum exhaust heat routing. The module can be drawn out for freezing circuit parts to check up and repair in an easy way.



TABLE

### Slide-out filter

The filter can be readily drawn out and in again to clean it up without a hassle.



TABLE

## Pursue food safety and security



### Temperature management automaiton

With HACCP ExAround, you can automatically and accurately record the temperature of the store's refrigerated and freezer showcases and the backyard refrigerator-freezers 24 hour a day.

# Adapting to and mitigating climate change + contributing to sustainable regional environments

## Maintenance which considers the environment and customers

In Japan, the service work to stand by customers who install refrigerator-freezers and showcases through a "24 hour system" starts after the products have been delivered. This includes, of course, maintenance repairs and periodic inspections as a well as a support system to address the increasingly stringent regulations of the Act on Rational Use and Proper Management of Fluorocarbons. Not only the customers who actually use the products but also our ability to provide support which is friendly to the global environment are the deciding factors in safety and security.

### GALILEI service network of branch stores and sales offices in 70 locations across in Japan

A flawless network which provides reassuring support from implementation to after-care. Feel free to inquire at the nearest branch office, branch store, or sales office.

Head Office	Osaka					
Branch Office	Higashi Nihon (Tokyo), Chubu (Nagoya), Chu Shikoku(Okayama) , Kyushu (Fukuoka)					
Branch Stores	Hokkaido (Sapporo)	Kita-Tohoku (Morioka)	Minami-Tohoku (Sendai)	Kita-Kanto(Tsukuba)		
	Saitama	Shinetsu (Niigata)	Yokohama	Shizuoka		
	Hokuriku (Kanazawa)	Kyoto	Minami-Osaka	Kobe		
	Hiroshima	Shikoku (Takamatsu)	Higashi-Kyushu (Ooita)	Seinan-Kyushu (Kumamoto)		
	Okinawa					
Sales Offices	Asahikawa	Obihiro	Hakodate	Noboribetsu	Kushiro	Aomori
Service Stations	Akita	Yamagata	Koriyama	Kita-Tokyo	Mlnami-Tokyo	Kashiwa
	Utsunomiya	Takasaki	Kofu	Nishi-Tokyo	Nagano	Matsumoto
	Mito	Nagaoka	Atugi	Numazu	Hamamatsu	Gifu
	Toyohashi	Mie	Toyama	Fukui	Fukuchiyama	Shiga
	Nara	Wakayama	Nishinomiya	Himeji	Tottori	Fukuyama
	Matsue	Yamaguchi	Tokushima	Kochi	Matsuyama	Kita-kyusyu
	Kurume	Saga	Miyazaki	Miyakonojyo	Sasebo	Kagoshima
	Miyakojima	Ishigaki				
Service centers	Kanto(Nishi-Funabashi)			Kansai(Osaka)		



### Installation example

#### Open kitchen / Special kitchen

Kitchen design and construction.

#### Supermarket backyard

Kitchen design and construction.

#### Specialty stores

Complete kitchen design and construction/ bakeries, udon shops, ramen shops, etc.

#### Special Processing Equipment

We also provide maintenance for equipment made by other companies.

#### Central Kitchen

Design and Construction.

# About F'S DESIGN COURT

The F'S DESIGN COURTS serve as a bridge of Asian cuisine cultures. The space is available for your various purposes; trying new recipes, food sampling, workshops, training sessions, etc. Feel free to inquire for your usage.



## What you can do in the showroom

- Cooling, freezing and thawing tests of food
- Fermentation and baking tests with bakery equipment
- As food menu development kitchen
- As workshop and training session space
- As market-research sampling and preference survey venue

\* For availability and tour, contact our sales staff in advance.

### F'S DESIGN COURT Bangkok



### F'S DESIGN COURT Ho Chi Minh



### F'S DESIGN COURT Jakarta



Let's take an example of F'S DESIGN COURT Bangkok in Thailand. This is located just one train stop from Khlong Toei Market, Thailand's largest fresh food market, also known as the "Kitchen of Bangkok". You can easily purvey fresh local ingredients. Local staff from Thailand may also participate in sampling and exchange opinions in order to check on different preferences in different countries.

## Equipment in Showrooms

### Rapid cooling equipment

#### Blast chiller & Shock freezer

To rapidly chill, freeze, and cool down cooked food intact.



### Commercial fridge/freezer

#### CFC-free fridge/freezer

Eco-friendly Green Refrigerant R1234yf is adopted.



### Defroster

#### Defroster with stepwise run function

To quickly defrost in high quality thanks to the big airflow and 2-step temperature setting.



### Bakery equipment

#### Dough conditioner

To automatically keep cool, thaw and secondary-ferment dough with high-precision temp./humidity control.



### Other appliances

#### Partner corporations Made-in-Japan equipment

Vacuum packaging machine, convection steam oven, dumpling frying machine, noodle boiling machine, deep fryer, multi-stack rice cooker, IH cooking heater, etc.



Installed equipment vary from showroom to showroom. In some Galilei offices without showroom, you may check actual machines and perform freezer tests. For details, contact our sales staff.

# UPRIGHT REFRIGERATOR


Large-capacity upright models  
These models take up less room, which helps you to use limited space.

## Chiller


### Width 610mm



ARD-060RXA



ARD-060RXA  
URD-060RMC



ARN-060RXA  
URN-060RMC

Temperature range -5°C to 10°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W) <sup>*</sup> Cooling	Power consumption(W) <sup>*</sup> Defrosting	Width×Depth×Height (mm)
Thick type 800	ARD-060RXA URD-060RMC	ECO Inverter	Single-phase 220V-240V	503	225	213	610×800×1,950
Thin type 650	ARN-060RXA URN-060RMC	ECO Inverter		390	225		610×650×1,950
					240		

● Stainless steel sheet interior


### Width 1,200mm



ARD-120RXA

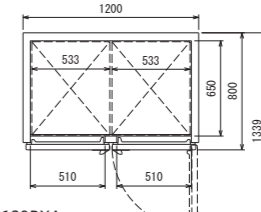

ARD-120RXA  
URD-120RMC

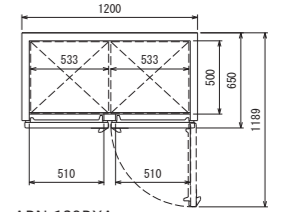

ARN-120RXA  
URN-120RMC

Temperature range -5°C to 10°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W) <sup>*</sup> Cooling	Power consumption(W) <sup>*</sup> Defrosting	Width×Depth×Height (mm)
Thick type 800	ARD-120RXA URD-120RMC	ECO Inverter	Single-phase 220V-240V	1,088	250	256	1,200×800×1,950
Thin type 650	ARN-120RXA URN-120RMC	ECO Inverter		845	250		1,200×650×1,950
					290		

● Stainless steel sheet interior


### Width 1,200mm



ARD-120RXFA

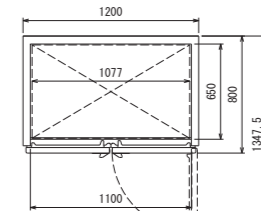

ARD-120RXFA  
URD-120RMFC

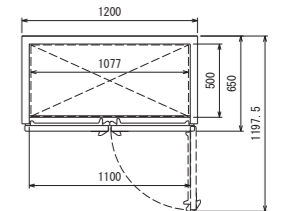

ARN-120RXFA  
URN-120RMFC

Temperature range -5°C to 10°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W) <sup>*</sup> Cooling	Power consumption(W) <sup>*</sup> Defrosting	Width×Depth×Height (mm)
Thick type 800	ARD-120RXFA URD-120RMFC	ECO Inverter	Single-phase 220V-240V	1,088	275	281	1,200×800×1,950
Thin type 650	ARN-120RXFA URN-120RMFC	ECO Inverter		845	275		1,200×650×1,950
				848	310		

● Stainless steel sheet interior


### Width 1,490mm



ARD-150RXA

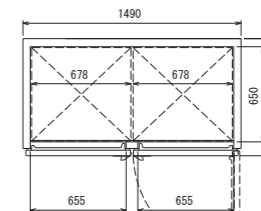

ARD-150RXA  
URD-150RMC

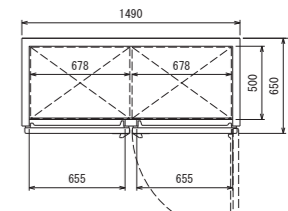

ARN-150RXA  
URN-150RMC

Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W) <sup>*</sup> Cooling	Power consumption(W) <sup>*</sup> Defrosting	Width×Depth×Height (mm)
Thick type 800	ARD-150RXA URD-150RMC	ECO Inverter	Single-phase 220V-240V	1,379	280	264	1,490×800×1,950
Thin type 650	ARN-150RXA URN-150RMC	ECO Inverter		1,072	280		1,490×650×1,950
					475		

● Stainless steel sheet interior

ECO Non-fluorocarbon refrigerant adopted Inverter Inverter control ※ The power consumption is for single phase 220V(50Hz)

UPRIGHT REFRIGERATOR


Large-capacity upright models  
These models take up less room, which helps you to use limited space.

Chiller



Width 1,490mm

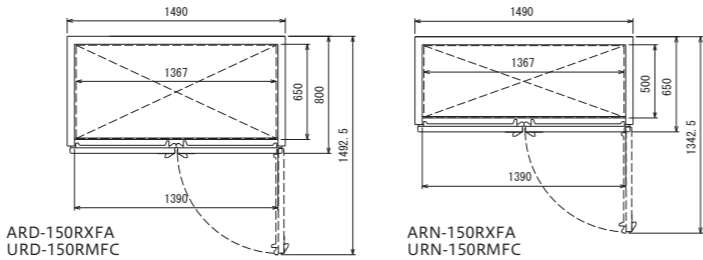

ARD-150RXFA



Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-150RXFA	 Inverter	Single-phase 220V-240V	1,379	305	286	1,490×800×1,950
	URD-150RMFC			1,382	495		
Thin type 650	ARN-150RXFA	 Inverter		1,072	305		1,490×650×1,950
	URN-150RMFC			1,075	495		


●Stainless steel sheet interior

Freezer



Width 610mm



ARD-062FXA

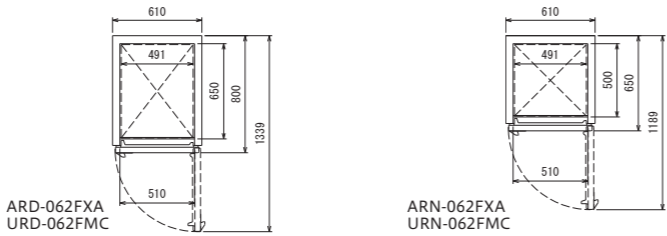

Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-062FXA	 Inverter	Single-phase 220V-240V	503	225	234	610×800×1,950
	URD-062FMC				370		
Thin type 650	ARN-062FXA	 Inverter		390	225		610×650×1,950
	URN-062FMC				370		

●Stainless steel sheet interior



Width 1,200mm

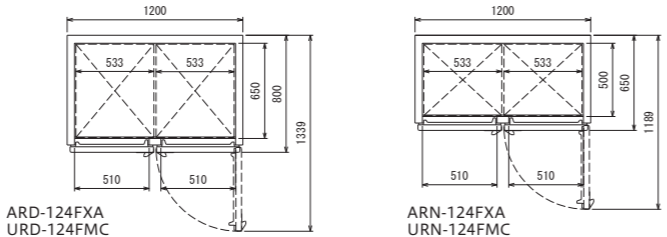

ARD-124FXA



Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-124FXA	 Inverter	Single-phase 220V-240V	1,082	425	496	1,200×800×1,950
	URD-124FMC			1,081	720		
Thin type 650	ARN-124FXA	 Inverter		839	425		1,200×650×1,950
	URN-124FMC			838	720		

●Stainless steel sheet interior



Width 1,200mm



ARD-124FXFA

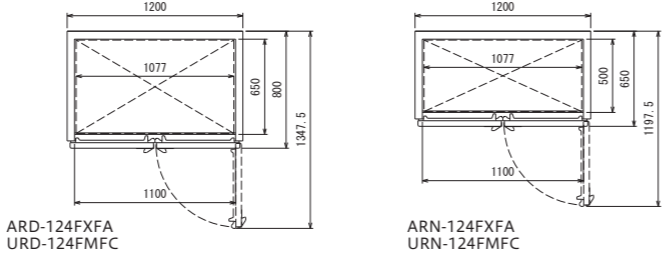

Temperature range -25°C to -15°C

Depth (mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-124FXFA	 Inverter	Single-phase 220V-240V	1,082	450	521	1,200×800×1,950
	URD-124FMFC			1,084	740		
Thin type 650	ARN-124FXFA	 Inverter		839	450		1,200×650×1,950
	URN-124FMFC			841	740		


●Stainless steel sheet interior

Freezer



Width 1,490mm

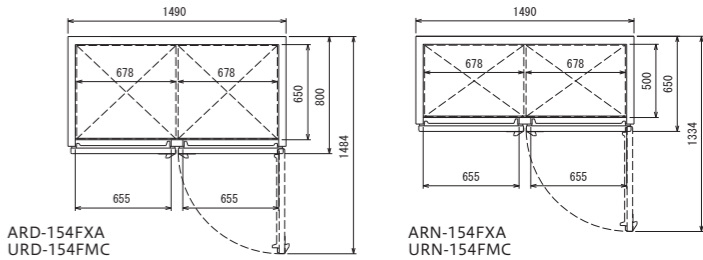

ARD-154FXA



Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-154FXA	 Inverter	Single-phase 220V-240V	1,373	475	503	1,490×800×1,950
	URD-154FMC			1,372	725		
Thin type 650	ARN-154FXA	 Inverter		1,066	475		1,490×650×1,950
	URN-154FMC			1,065	725		

●Stainless steel sheet interior





Width 1,490mm

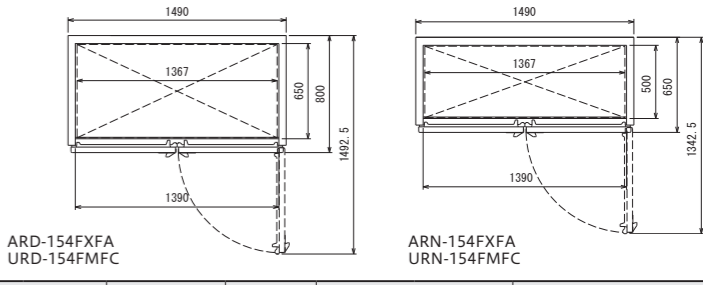

ARD-154FXFA




Temperature range -25°C to -15°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thick type 800	ARD-154FXFA	 	Single-phase 220V-240V	1,373	500	526	1,490×800×1,950
	URD-154FMFC			1,375	745		
Thin type 650	ARN-154FXFA	 		1,066	500	526	1,490×650×1,950
	URN-154FMFC			1,068	745		

●Stainless steel sheet interior


Cross-section view

■ARD/URD series commonness

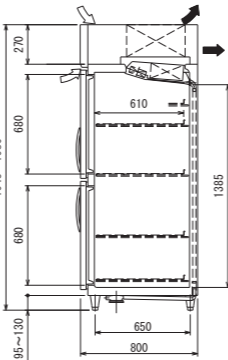

↺ SUCTION AIR  
↗ EXHAUST AIR




■ARN/URN series commonness

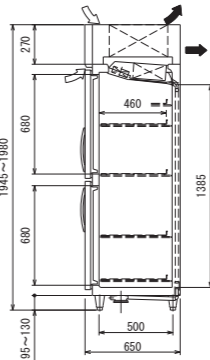


Improve your energy saving tremendously.  
Because meat, fish and vegetables last long, it's convenient.

Our original wall cold storage medium requires no air circulating fan inside.

- Various foodstuffs in their optimum environment (high performance)
- High humidity maintained (above 90%\*on average)  
\* In case of 1°C of preset temperature in the storage, the effect is different. in the kind of foods and the state depending on operation conditions.
- Air current reduction (Static cooling)
- Preserving foodstuff freshness (temperature settings at -5 to 15°C)
- Compartments individually preset and controlled

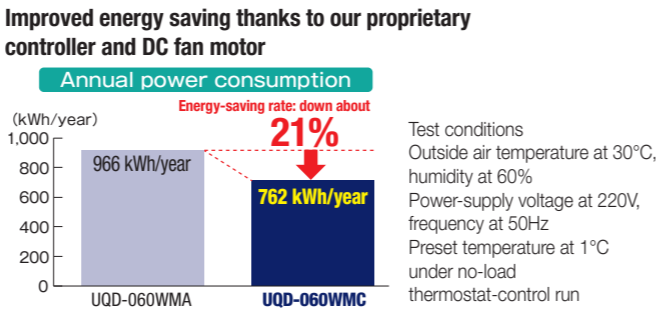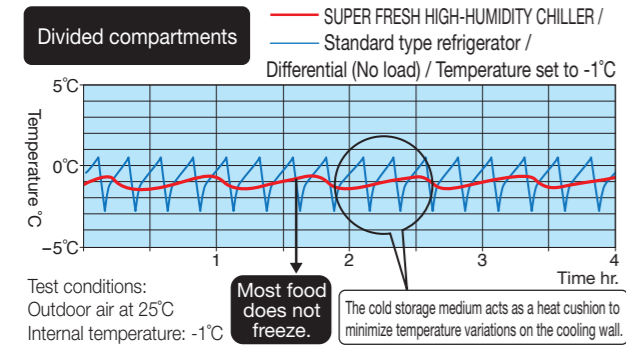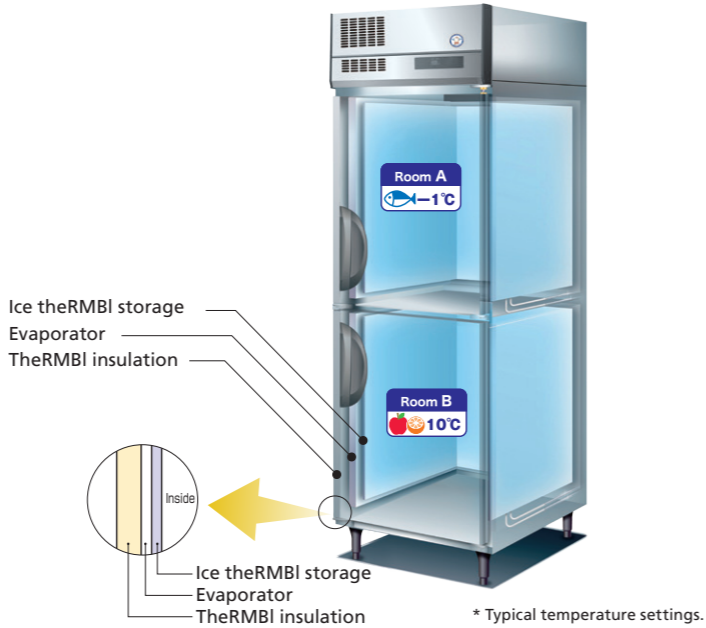

Depth 800mm / Width 610mm Chiller

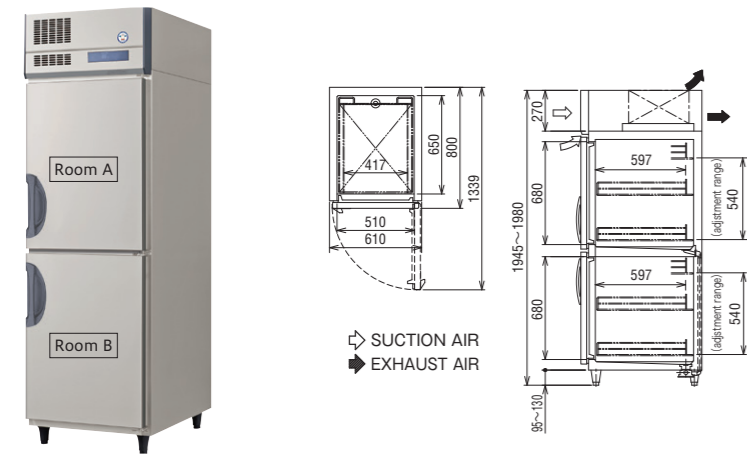

Temperature range -5°C to 15°C

Depth(mm)		Thick type 800
Model number		UQD-060WMC
Power supply (50/60Hz)		Single-phase 220V-240V
Room size(mm) W×D×H	Room A	510×650×710
	Room B	510×650×695
Rated volume (L)	Room A	245
	Room B	240
Power consumption(W)*	Cooling	470
	Defrosting	—
Shelf net size (mm) W×D		417×597
Width×Depth×Height(mm)		610×800×1,950


●Stainless steel sheet interior

Freezer /Chiller





Width 1,200mm

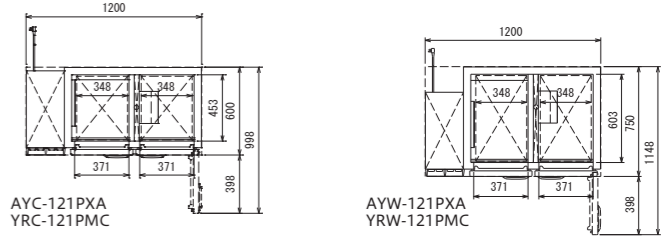

AYC-121PXA




Chiller temperature -5°C to 10°C  
Freezer temperature -25°C to -15°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)		Power consumption(W)*		Width×Depth×Height (mm)
				Freezer	Chiller	Cooling	Defrosting	
Thin type 600	AYC-121PXA	 	Single-phase 220V-240V	107	104	245	352	1,200×600×800
	YRC-121PMC					390	315	
Thick type 750	AYW-121PXA	 		142	137	250	352	1,200×750×800
	YRW-121PMC					410	315	
●Stainless steel sheet interior								





Width 1,500mm

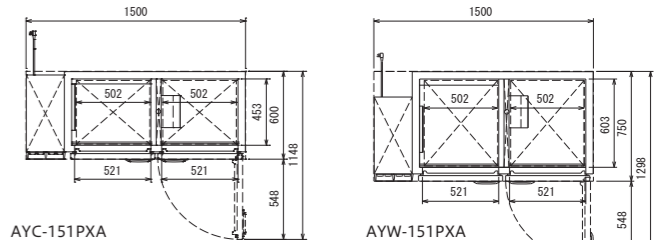

AYC-151PXA




Chiller temperature -5°C to 10°C  
Freezer temperature -25°C to -15°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)		Power consumption(W) <sup>a</sup>		Width×Depth×Height (mm)
				Freezer	Chiller	Cooling	Defrosting	
Thin type 600	AYC-151PXA	 	Single-phase 220V-240V	150	147	250	355	1,500×600×800
	YRC-151PMC					395	318	
Thick type 750	AYW-151PXA	 		198	194	255	355	1,500×750×800
	YRW-151PMC					415	318	



Width 1,800mm



AYC-181PXA

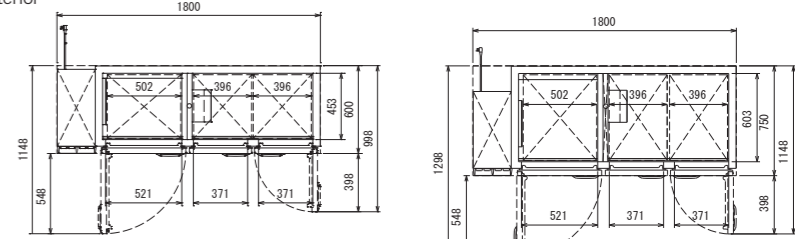

Chiller temperature -5°C to 10°C  
Freezer temperature -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)		Power consumption(W)*		Width×Depth×Height (mm)
				Freezer	Chiller	Cooling	Defrosting	
Thin type 600	AYC-181PXA	 Inverter	Single-phase 220V-240V	150	234	260	366	1,800×600×800
	YRC-181PMC					425	326	
Thick type 750	AYW-181PXA	 Inverter		198	307	265	366	1,800×750×800
	YRW-181PMC					445	326	
●Stainless steel sheet interior								

Chiller

Width 1,200mm



AYC-120RXA

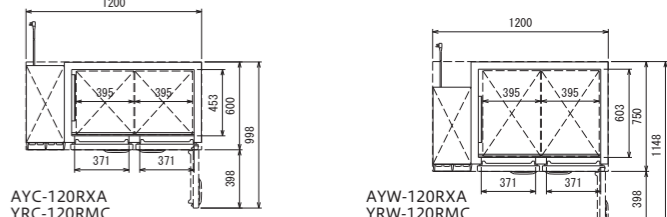

Temperature range -5°C to 10°C



Depth (mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume (L)	Power consumption (W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-120RXA	 Inverter	Single-phase 220V-240V	237	175	231	1,200×600×800
	YRC-120RMC				160	193	
Thick type 750	AYW-120RXA	 Inverter		312	180	231	1,200×750×800
	YRW-120RMC				200	193	

TABLE TYPE REFRIGRATOR


Staff-friendly horizontal models  
The top panel doubles as a work table for staffers' convenience.

Chiller


Width 1,200mm



AYC-120RXFA



AYC-120RXFA  
YRC-120RMFC




AYW-120RXFA  
YRW-120RMFC


Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-120RXFA YRC-120RMFC	Inverter	Single-phase 220V-240V	238	180	237	1,200×600×800
					165	199	
Thick type 750	AYW-120RXFA YRW-120RMFC	Inverter	Single-phase 220V-240V	313	185	237	1,200×750×800
					205	199	

●Stainless steel sheet interior

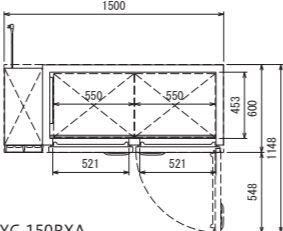

AYC-150RXA  
YRC-150RMC

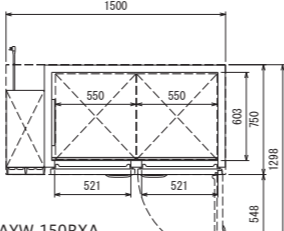


AYW-150RXA  
YRW-150RMC


Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-150RXA YRC-150RMC	Inverter	Single-phase 220V-240V	325	195	235	1,500×600×800
					175	198	
Thick type 750	AYW-150RXA YRW-150RMC	Inverter	Single-phase 220V-240V	426	200	235	1,500×750×800
					215	198	

●Stainless steel sheet interior

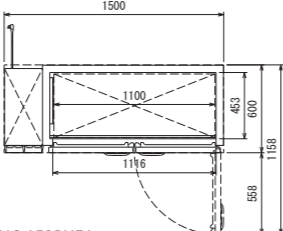

AYC-150RXFA  
YRC-150RMFC

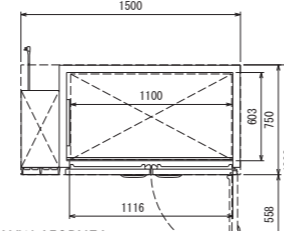


AYW-150RXFA  
YRW-150RMFC


Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-150RXFA YRC-150RMFC	Inverter	Single-phase 220V-240V	326	200	242	1,500×600×800
					180	204	
Thick type 750	AYW-150RXFA YRW-150RMFC	Inverter	Single-phase 220V-240V	428	205	242	1,500×750×800
					220	204	

●Stainless steel sheet interior

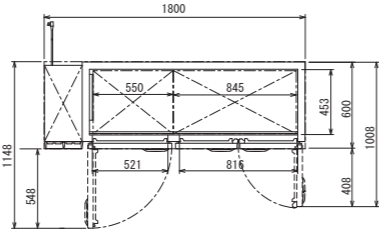

AYC-180RXFA  
YRC-180RMFC

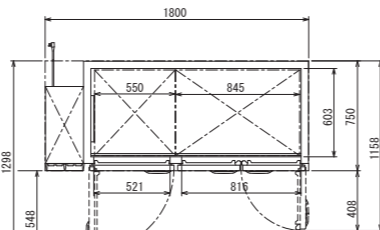

AYW-180RXFA  
YRW-180RMFC

Temperature range -5°C to 10°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-180RXFA YRC-180RMFC	Inverter	Single-phase 220V-240V	411	205	257	1,800×600×800
					195	219	
Thick type 750	AYW-180RXFA YRW-180RMFC	Inverter	Single-phase 220V-240V	540	210	257	1,800×750×800
					235	219	

●Stainless steel sheet interior

Width 1,500mm



AYC-150RXA

Width 1,500mm



AYC-150RXFA

Width 1,800mm




AYC-180RXFA

Freezer


Width 1,200mm



AYC-122FXA



AYC-122FXA  
YRC-122FMFC



AYW-122FXA  
YRW-122FMFC

Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-122FXA YRC-122FMFC	Inverter	Single-phase 220V-240V	237	185	231	1,200×600×800
					355	205	
Thick type 750	AYW-122FXA YRW-122FMFC	Inverter	Single-phase 220V-240V	312	190	231	1,200×750×800
					355	205	

●Stainless steel sheet interior


Width 1,200mm



AYC-122FXFA



AYC-122FXFA  
YRC-122FMFC



AYW-122FXFA  
YRW-122FMFC

Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-122FXFA YRC-122FMFC	Inverter	Single-phase 220V-240V	238	190	237	1,200×600×800
					345	211	
Thick type 750	AYW-122FXFA YRW-122FMFC	Inverter	Single-phase 220V-240V	313	195	237	1,200×750×800
					365	211	

●Stainless steel sheet interior


Width 1,500mm



AYC-152FXA

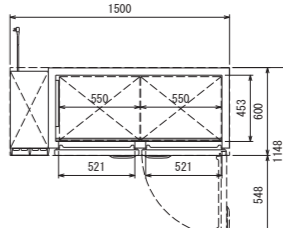

AYC-152FXA  
YRC-152FMFC

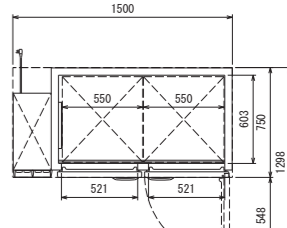

AYW-152FXA  
YRW-152FMFC

Temperature range -25°C to -15°C


Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-152FXA YRC-152FMFC	Inverter	Single-phase 220V-240V	325	215	235	1,500×600×800
					340	210	
Thick type 750	AYW-152FXA YRW-152FMFC	Inverter	Single-phase 220V-240V	426	220	235	1,500×750×800
					360	210	

●Stainless steel sheet interior


Width 1,500mm



AYC-152FXFA

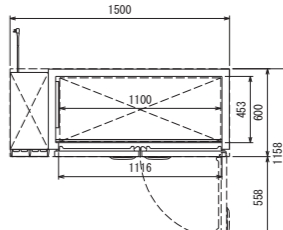

AYC-152FXFA  
YRC-152FMFC

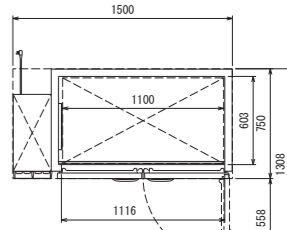

AYW-152FXFA  
YRW-152FMFC

Temperature range -25°C to -15°C

Depth(mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume(L)	Power consumption(W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-152FXFA YRC-152FMFC	Inverter	Single-phase 220V-240V	326	220	242	1,500×600×800
					350	216	
Thick type 750	AYW-152FXFA YRW-152FMFC	Inverter	Single-phase 220V-240V	428	225	242	1,500×750×800
					370	216	

●Stainless steel sheet interior

TABLE TYPE REFRIGRATOR


Staff-friendly horizontal models  
The top panel doubles as a work table for staffers' convenience.

Freezer

Width 1,800mm



AYC-183FXA

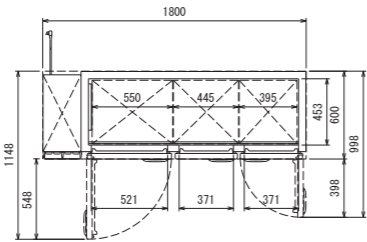

AYC-183FXA  
YRC-183FMC

Temperature range -25°C to -15°C


Depth (mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume (L)	Power consumption (W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	AYC-183FXA YRC-183FMC	ECO Inverter	Single-phase 220V-240V	410	240	250	1,800×600×800
Thick type 750	AYW-183FXA YRW-183FMC	ECO Inverter		538	245	250	1,800×750×800
					370	225	
					390	225	

●Stainless steel sheet interior

Width 1,800mm



YRC-183FMC

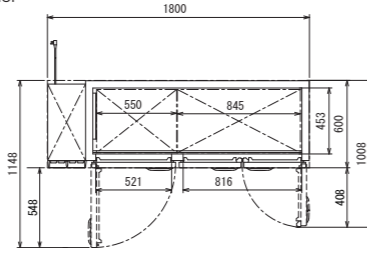


YRC-183FMC


Temperature range -25°C to -15°C

Depth (mm)	Model number	Specification	Power supply (50/60Hz)	Rated volume (L)	Power consumption (W)*		Width×Depth×Height (mm)
					Cooling	Defrosting	
Thin type 600	YRC-183FMC		Single-phase 220V-240V	411	385	233	1,800×600×800
Thick type 750	YRW-183FMC			540	405		1,800×750×800

●Stainless steel sheet interior

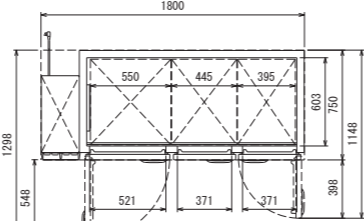


AYW-183FXA  
YRW-183FMC

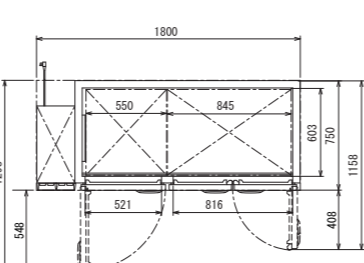


YRW-183FMC

Cross-section view

■AYC/YRC series commonness

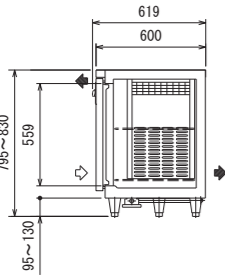

■AYW/YRW series commonness

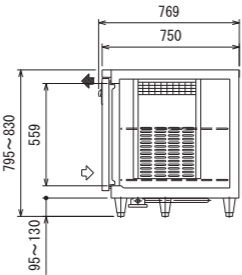

↺ SUCTION AIR  
↻ EXHAUST AIR

TABLE TYPE REFRIGRATOR 1/1 GN PANS CAPACITY

Width 1,200mm

Chiller




AYN-120RXP3A

Temperature range -5°C to 10°C

Depth (mm)		Thin type 660	
Model number		AYN-120RXP3A	YRN-120RMP3C
Specification		ECO Inverter	
Power supply (50/60Hz)		Single-phase 220V-240V	
Rated volume (L)		271	
Power consumption (W)*	Cooling	180	200
	Defrosting	231	193
Width×Depth×Height (mm)		1,200×660×800	

●Stainless steel sheet interior  
※Not include 1/1 GN pans.

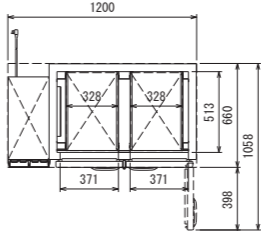

Drain water evaporator



AYN-120RXP3A

Temperature range -5°C to 10°C

Depth (mm)		Thin type 660	
Model number		AYN-120RXP3A	YRN-120RMP3C
Specification		ECO Inverter	
Power supply (50/60Hz)		Single-phase 220V-240V	
Rated volume (L)		271	
Power consumption (W)*	Cooling	260	310
	Defrosting	313	275
Width×Depth×Height (mm)		1,200×660×800	

●Stainless steel sheet interior  
※Not include 1/1 GN pans.

Width 1,650mm

Chiller




AYN-160RXP3A

Temperature range -5°C to 10°C

Depth (mm)		Thin type 660	
Model number		AYN-160RXP3A	YRN-160RMP3C
Specification		ECO Inverter	
Power supply (50/60Hz)		Single-phase 220V-240V	
Rated volume (L)		417	
Power consumption (W)*	Cooling	210	235
	Defrosting	239	207
Width×Depth×Height (mm)		1,650×660×800	

●Stainless steel sheet interior  
※Not include 1/1 GN pans.

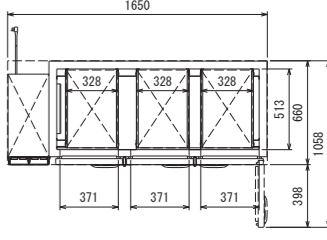

Drain water evaporator



AYN-160RXP3A


Temperature range -5°C to 10°C

Depth (mm)		Thin type 660	
Model number		AYN-160RXP3A	YRN-160RMP3C
Specification		ECO Inverter	
Power supply (50/60Hz)		Single-phase 220V-240V	
Rated volume (L)		417	
Power consumption (W)*	Cooling	290	345
	Defrosting	321	289
Width×Depth×Height (mm)		1,650×660×800	

●Stainless steel sheet interior  
※Not include 1/1 GN pans.

Can easily accommodate 1/1 GN pans!

Cross-section view



# GLASS DOOR CABINET

Plug-in type. Slim design allows for easy installation in any location.

### Temperature indication part



The temperature indication department with good visibility.

### Handle




Durable and high design.

### Equipped with earth leakage breaker



It is standard equipment to improve safety.  
\*Image : Freezer model.

### casters

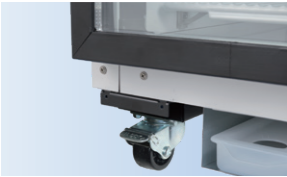

You can be laid out freely by casters with stopper.

Temperature range  
Chiller : 0 to 10°C  
Freezer : -25 to -15°C

### LED light



Illuminates the entire interior of the cabinet.  
Long life and save energy.  
\*Image : Width 1,200mm type.

### No drainage connection



Equipped with [Drain Tank] as standard.  
\*Need to drain when the tank is full.  
\*\*Can be modified to [Drain evaporator] as an option.  
It'll be a leg of the 150mm.  
On-site installation is not available.

### Option Skirting board



\*It'll be a leg of the 100mm.  
\*On-site installation is not available.  
\*Equipped with window for taking out the drain tank.

### How to read the model numbers


UED - 120 R E C - T H

- ① Series  
UED=Glass door cooler (depth 800mm)  
UEN=Glass door cooler (depth 650mm)
- ② Width  
060=width 610mm  
120=width 1200mm
- ③ Temperature range  
R=Chiller  
F=Freezer

- ④ Interior material  
E=Color steel
- ⑤ Model change number
- ⑥ The country basis power supply specification (the voltage)  
TH=For Thailand (single-phase 220V/50Hz)  
VI=For Vietnam, Indonesia (single-phase 220V/50Hz)  
HK=For Hong Kong (single-phase 220V/50Hz)

- SI=For Singapore, Cambodia, Myanmar (single-phase 230V/50Hz)
- MA=For Malaysia (single-phase 240V/50Hz)
- PH=For Philippines (single-phase 220V/60Hz)
- TA=For Taiwan (single-phase 220V/60Hz)
- AU=For Australia (single-phase 240V/50Hz)


### Width 610mm Chiller

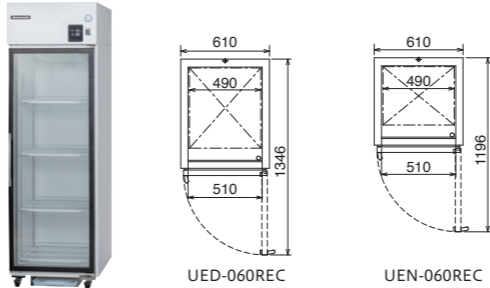

Temperature range 0 to 10°C

Depth (mm)	Thick type 800	Thin type 650
Model number	UED-060REC	UEN-060REC
Power supply (50/60Hz)	Single-phase 220V-240V	
Effective Capacity (L)	459	353
Power consumption (W)*	Cooling	255
	Defrosting	28
Width×Depth×Height (mm)		
610×800×1,950    610×650×1,950		


### Width 1,200mm Chiller

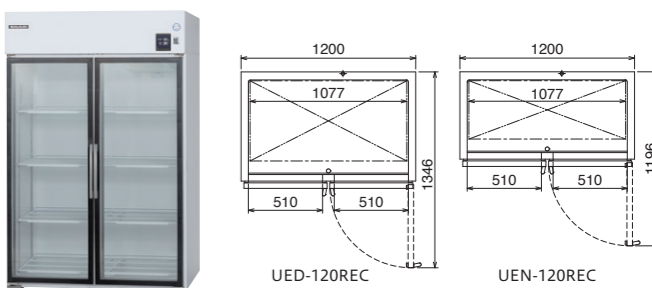

Temperature range 0 to 10°C

Depth (mm)	Thick type 800	Thin type 650
Model number	UED-120REC	UEN-120REC
Power supply (50/60Hz)	Single-phase 220V-240V	
Effective Capacity (L)	990	762
Power consumption (W)*	Cooling	300
	Defrosting	45
Width×Depth×Height (mm)		
1,200×800×1,950    1,200×650×1,950		


### Width 610mm Freezer

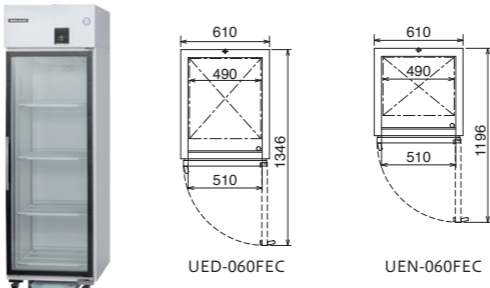

Temperature range -25 to -15°C

Depth (mm)	Thick type 800	Thin type 650
Model number	UED-060FEC	UEN-060FEC
Power supply (50/60Hz)	Single-phase 220V-240V	
Effective Capacity (L)	459	353
Power consumption (W)*	Cooling	505
	Defrosting	321
Width×Depth×Height (mm)		
610×800×1,950    610×650×1,950		

### Width 1,200mm Freezer

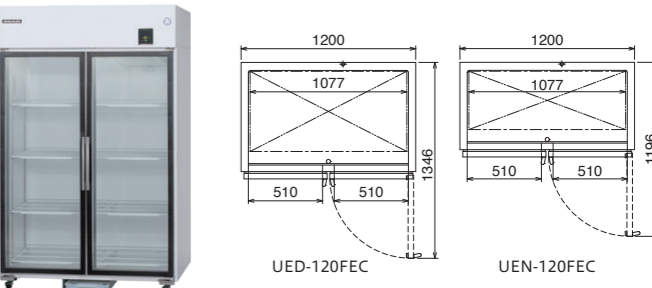


Temperature range -25 to -15°C


Depth (mm)	Thick type 800	Thin type 650
Model number	UED-120FEC	UEN-120FEC
Power supply (50/60Hz)	Single-phase 220V-240V	
Effective Capacity (L)	990	762
Power consumption (W)*	Cooling	970
	Defrosting	644
Width×Depth×Height (mm)		
1,200×800×1,950    1,200×650×1,950		

### Cross-section view

#### UED series commonness

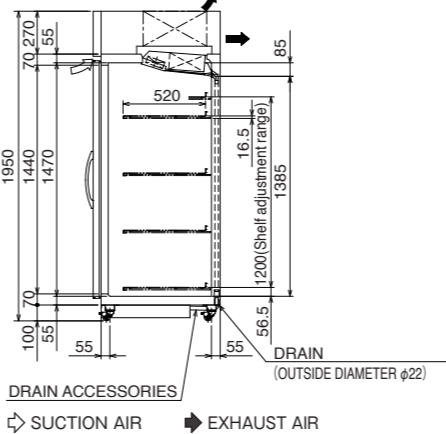


#### UEN series commonness

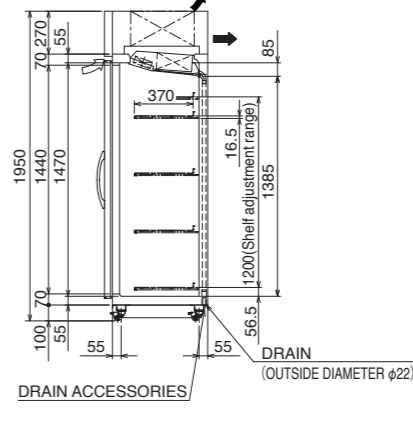


SLIDE DOOR TYPE(TABLE TYPE) GLASS DOOR CABINET

INVERTER PLUG-IN TYPE ISLAND SHOWCASE


Width 900mm

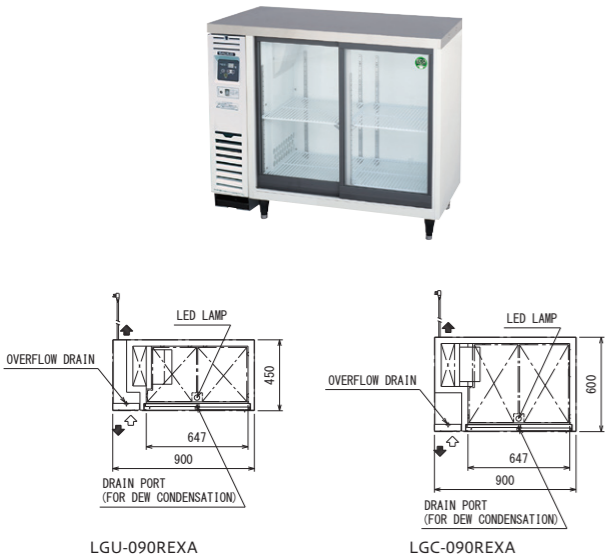


Temperature range 2°C to 10°C		Inverter	
Depth (mm)		Ultra Thin type 450	Thin type 600
Model number		LGU-090REXA	LGC-090REXA
Specification			
Power supply (50/60Hz)		Single-phase220V-240V	
Rated volume (L)		139	197
Power consumption (W)*	Cooling	225	235
Width×Depth×Height (mm)		900×450×800	900×600×800

●Color steel interior


Width 1,200mm

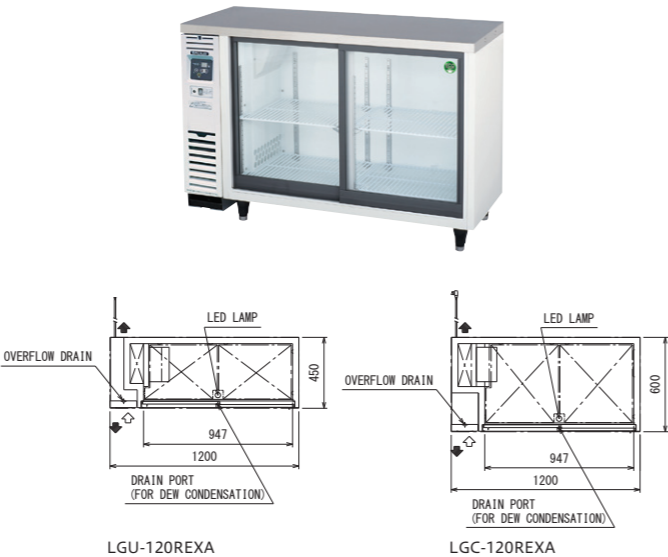


Temperature range 2°C to 10°C		Inverter	
Depth (mm)		Ultra Thin type 450	Thin type 600
Model number		LGU-120REXA	LGC-120REXA
Specification			
Power supply (50/60Hz)		Single-phase220V-240V	
Rated volume (L)		207	293
Power consumption (W)*	Cooling	235	245
Width×Depth×Height (mm)		1,200×450×800	1,200×600×800

●Color steel interior

Width 1,500mm

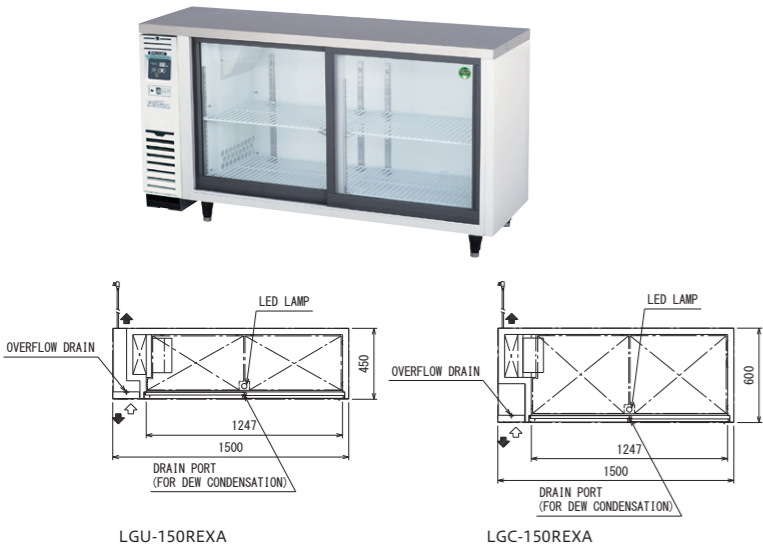


Temperature range 2°C to 10°C		Inverter	
Depth (mm)		Ultra Thin type 450	Thin type 600
Model number		LGU-150REXA	LGC-150REXA
Specification			
Power supply (50/60Hz)		Single-phase220V-240V	
Rated volume(L)		274	388
Power consumption (W)*	Cooling	240	250
Width×Depth×Height (mm)		1,500×450×800	1,500×600×800

●Color steel interior

■ LGU series commonness


■ LGC series commonness

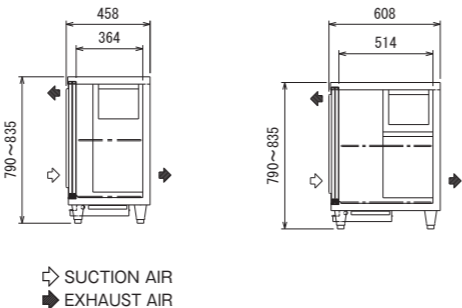

Cross-section view

For all stores seeking food safety and environmental friendliness


Environmental conservation

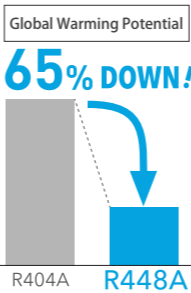

The refrigerant was changed from R404A(GWP:3920) to R448A(GWP:1387), which has a lower global warming potential, reducing the global warming potential by about 65%.  
※GWP figures are quoted from IPCC Fourth assessment report in 2007.

Inverter Control for energy saving

Roll-up Night covers(option)



※The image is Japanese specification.

Equipped with wheels



-2°C~+15°C NEW

Fresh Fish/Meat Sweets Deli

Technical drawing and specifications for the AMC-4ARGFJAO model. The technical drawing shows a side view with dimensions: 1200 (BODY) x 900 (BODY) x 850 (HEIGHT). The specifications table is as follows:

Model number	AMC-4ARGFJAO	
Effective Capacity (L)	148	
Display Area (m²)	0.72	
Weight (kg)	138	
Power consumption (W)*	Cooling	301
Single phase220V-240V 50/60Hz	Defrosting	285
Width×Depth×Height (mm)		1,200 (1,221) × 900 (921) × 850

Technical drawing and specifications for the AMC-8ARGFJAO model. The technical drawing shows a side view with dimensions: 2400 (BODY) x 900 (BODY) x 850 (HEIGHT). The specifications table is as follows:

Model number	AMC-8ARGFJAO	
Effective Capacity (L)	315	
Display Area (m²)	1.52	
Weight (kg)	198	
Power consumption (W)*	Cooling	465
Single phase220V-240V 50/60Hz	Defrosting	543
Width×Depth×Height (mm)		2,400 (2,421) × 900 (921) × 850

-20°C~+15°C

Frozen Food Fresh Fish/Meat Sweets Deli

Technical drawing and specifications for the AMC-5APGFJAO model. The technical drawing shows a side view with dimensions: 1500 (BODY) x 900 (BODY) x 850 (HEIGHT). The specifications table is as follows:

Model number	AMC-5APGFJAO	
Effective Capacity (L)	190	
Display Area (m²)	0.92	
Weight (kg)	154	
Power consumption (W)*	Cooling	668
Single phase220V-240V 50/60Hz	Defrosting	870
Width×Depth×Height (mm)		1,500 (1,521) × 900 (921) × 850

Technical drawing and specifications for the AMC-6APGFJAO model. The technical drawing shows a side view with dimensions: 1800 (BODY) x 900 (BODY) x 850 (HEIGHT). The specifications table is as follows:

Model number	AMC-6APGFJAO	
Effective Capacity (L)	232	
Display Area (m²)	1.12	
Weight (kg)	167	
Power consumption (W)*	Cooling	747
Single phase220V-240V 50/60Hz	Defrosting	1,008
Width×Depth×Height (mm)		1,800 (1,821) × 900 (921) × 850

How to read the model numbers

AMC-4ARGFJAO

- ① Series: AMC=depth900mm
- ② Width: 4=width 1,200mm, 5=width 1,500mm, 6=width 1,800mm, 8=width 2,400mm
- ③ Model change number
- ④ Temperature range: R=Chiller, P=Freezer/Chiller
- ⑤ Height of glass: G=height of glass 100mm
- ⑥ Height: F=height 850mm
- ⑦ The power supply specification: J=The different voltage specification
- ⑧ The drainage specification: A=The drain evaporator specification
- ⑨ Night cover: O=Option, N=None

MULTI-DECK OPEN SHOWCASE

Plug-in type. Equipped with an inverter for energy saving and freshness control.

Temperature indication part



Provide the temperature indicator which it is easy to see digitally.

LED light



LED lighting is standard equipment on the louver. It evenly illuminates the inside of the showcase.  
\*Shelf lighting is an option.

Plug-in Cooling unit

The plug-in cooling unit helps with free layout.

Casters



Equipped with [Casters] as standard. You can freely change the layout of the product according to the event.

Temperature range  
3 to 20°C



Advanced temperature control

Adopt an inverter Compressor. Advanced temperature control is achieved by inverter control.


Night cover



Equipped with [Night cover] as standard. It becomes the energy saving by using the night cover when the store is closed.

Drain tank or Drain evaporator

You can choose a equipment [Drain tank] or [Drain evaporator]. Both mode! not need to connect to drainage.

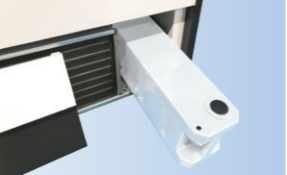


[Drain tank]  
•Need to drain when the tank is full.




[Drain evaporator]

Depth 600mm High1,500mm



Temperature range 3 to 20°C


Depth (mm)	Thin type 600	
Equipment	Drain tank	Drain Evaporator
Model number	MEU-3AGHJT3L	MEU-3AGHJA3L
Power supply (50/60Hz)	Single-phase220V-240V	
Effective Capacity (L)	262	
Power consumption (W)*	Cooling	555
	Defrosting	76
Width×Depth×Height (mm)	900×600×1,500	



Temperature range 3 to 20°C


Depth (mm)	Thin type 600	
Equipment	Drain tank	Drain Evaporator
Model number	MEU-4AGHJT3L	MEU-4AGHJA3L
Power supply (50/60Hz)	Single-phase220V-240V	
Effective Capacity (L)	353	
Power consumption (W)*	Cooling	950
	Defrosting	76
Width×Depth×Height (mm)	1,200×600×1,500	

Depth 750mm High1,900mm



Temperature range 3 to 20°C

Depth (mm)	Thick type 750	
Equipment	Drain tank	Drain Evaporator
Model number	MEK-3AGKJT5L	MEK-3AGKJA5L
Power supply (50/60Hz)	Single-phase220V-240V	
Effective Capacity (L)	539	
Power consumption (W)*	Cooling	600
	Defrosting	87
Width×Depth×Height (mm)	900×750×1,900	




Temperature range 3 to 20°C

Depth (mm)	Thick type 750	
Equipment	Drain tank	Drain Evaporator
Model number	MEK-4AGKJT5L	MEK-4AGKJA5L
Power supply (50/60Hz)	Single-phase220V-240V	
Effective Capacity (L)	727	
Power consumption (W)*	Cooling	1,100
	Defrosting	87
Width×Depth×Height (mm)	1,200×750×1,900	


Cross-section view

MEU series commonness

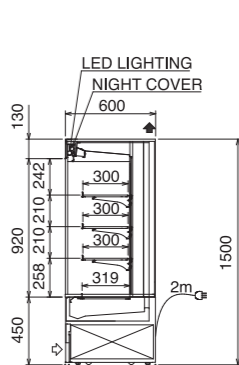

➡ SUCTION AIR  
➡ EXHAUST AIR

MEK series commonness

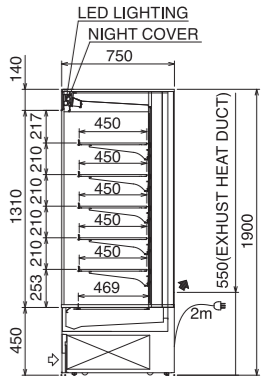

How to read the model numbers

MEU-3AGHJT3L-TH


- ①Series  
MEU=depth600mm  
MEK=depth750mm  
②Width  
3=width 900mm  
4=width 1200mm  
6=width 1755mm  
③Model change number  
④Temperature range  
G=Chiller  
⑤Height  
H=1500mm  
K=1900mm

- ⑥The power supply specification  
J=The different voltage specification  
⑦The drainage specification  
T=The drain tank specification  
A=The drain evaporator specification  
⑧Number of shelves  
3=Three layer shelves  
5=Five layer shelves  
⑨The shelf specification  
L=Iron plate shelf (Without illumination)  
⑩The country basis power supply specification  
(the voltage)  
TH=For Thailand  
(single-phase 220V/50Hz)

- VI=For Vietnam,Indonesia  
(single-phase 220V/50Hz)  
HK=For Hong Kong  
(single-phase 220V/50Hz)  
SI=For Singapore, Cambodia, Myanmar  
(single-phase 230V/50Hz)  
MA=For Malaysia  
(single-phase 240V/50Hz)  
PH=For Philippines  
(single-phase 220V/60Hz)  
TA=For Taiwan  
(single-phase 220V/60Hz)

Temperature range 3 to 20°C

Depth (mm)	Thick type 750	
Equipment	Drain tank	Drain Evaporator
Model number	MEK-6AGKJT5L	MEK-6AGKJA5L
Power supply (50/60Hz)	Single-phase220V-240V	
Effective Capacity (L)	1,077	
Power consumption (W)*	Cooling	1,710
	Defrosting	121
Width×Depth×Height (mm)	1,755×750×1,900	

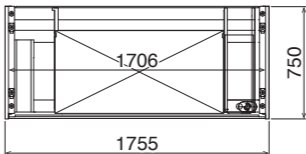

※ The power consumption is for single phase 220V(50Hz)

ICE MAKERS ICE CUBES

Amazingly clear ice in an energy-saving way


MIRACLEAR™

M I R A C L E A R

Ice cubes <Cell-type>

Preparing very transparent, almost impurity-free ice cubes

The automatic cell-type ice makers provide clear ice cubes. Not just for beverages but also for cooling, the machines serve in a wide range of applications.

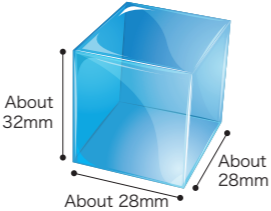


Ice cubes Fully renovated models

Under counter type


25kg type

Ice storage About13.5kg

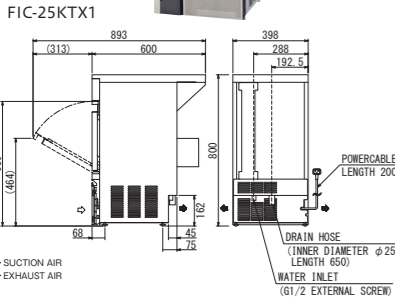


35kg type

Ice storage About17.0kg

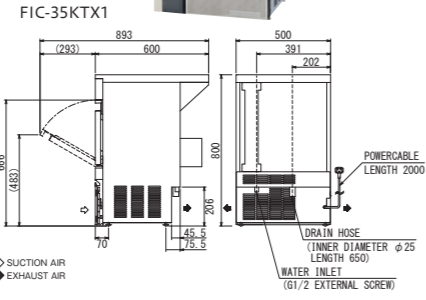

45kg type

Ice storage About24.0kg

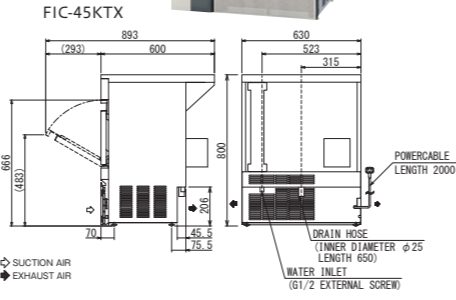


Model number	Specification	Power supply	Width×Depth×Height (mm)	Ice manufacture capacity(About)(50/60Hz)(kg per day)	
				Room temperature:20°C / Water temperature:15°C	Room temperature:30°C / Water temperature:25°C
FIC-25KTX1		220-240V	398×600×800	25/28	21/23
FIC-35KTX1		220-240V	500×600×800	34/37	30/33
FIC-45KTX		220-240V	630×600×800	43/46	37/41

※Imaged products are for the Japanese market.


65kg type

Ice storage About29.1kg

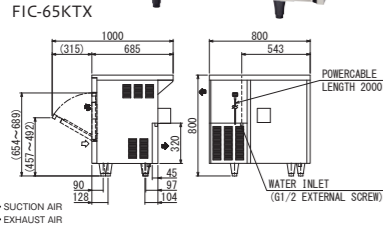


75kg type

Ice storage About45.9kg

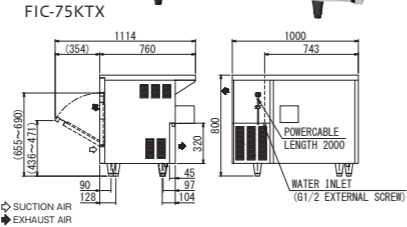

95kg type

Ice storage About45.9kg

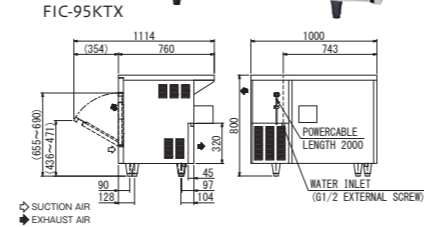


Model number	Specification	Power supply	Width×Depth×Height (mm)	Ice manufacture capacity(About)(50/60Hz)(kg per day)	
				Room temperature:20°C / Water temperature:15°C	Room temperature:30°C / Water temperature:25°C
FIC-65KTX		220-240V	800×685×800	59/65	50/52
FIC-75KTX		220-240V	1,000×760×800	87/95	72/79
FIC-95KTX		220-240V	1,000×760×800	90/97	75/82

※Imaged products are for the Japanese market.

Vertical type


65kg type

Ice storage About30.3kg

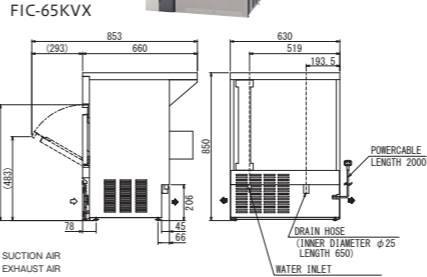


75kg type

Ice storage About51.2kg

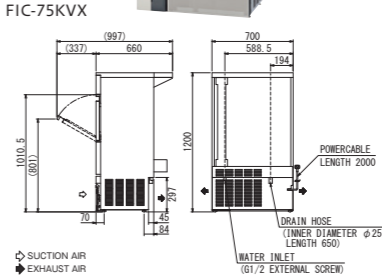

95kg type

Ice storage About51.2kg

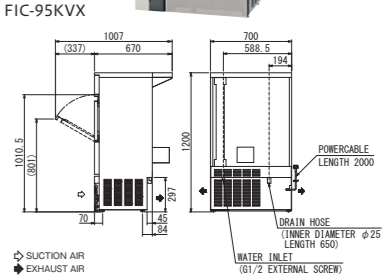

Model number	Specification	Power supply	Width×Depth×Height (mm)	Ice manufacture capacity(About)(50/60Hz)(kg per day)	
				Room temperature:20°C / Water temperature:15°C	Room temperature:30°C / Water temperature:25°C
FIC-65KVX		220-240V	630×660×850	62/67	53/58
FIC-75KVX		220-240V	700×660×1,200	79/86	66/74
FIC-95KVX		220-240V	700×670×1,200	97/101	84/90


※Imaged products are for the Japanese market.

ICE MAKERS ICE CHIPS / ICE FLAKES

Ice chips/ Ice flakes <Auger system>

Thanks to its smaller drain-caused loss, the automatic auger ice makers help cut down on running cost. The great ice making capacity allows you to consume a large amount of ice. Best choice for beverages and ice bedding.

Ice chips



Ice flakes




Small irregularly shaped ice chips and flakes

※ The size and shape shown here are typical. They depend on the setup environment, water temperature and operating hours.


Ice chips maker

100kg type

Ice storage About34kg

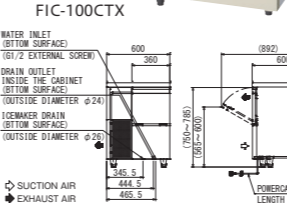


Ice storage About63kg

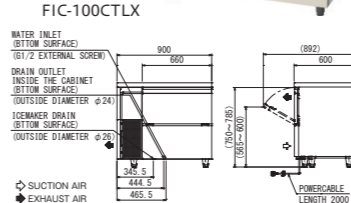


Ice flakes maker

120kg type

Ice storage About24kg

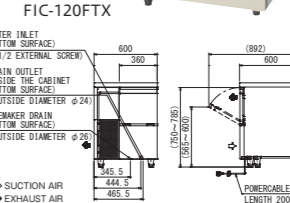

Ice storage About46kg

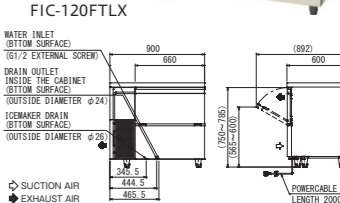

Model number	Specification	Power supply	Width×Depth×Height (mm)	Ice manufacture capacity(About)(50/60Hz)(kg per day)	
				Room temperature:20°C / Water temperature:15°C	Room temperature:30°C / Water temperature:25°C
FIC-100CTX		220-240V	600×600×800	93/103	76/83
FIC-100CTLX		220-240V	900×600×800	93/103	76/83
FIC-120FTX		220-240V	600×600×800	110/120	89/98
FIC-120FTLX		220-240V	900×600×800	110/120	89/98

※ Carry-in and installation charges are separately estimated.

BLAST CHILLER/SHOCK FREEZER

Features of blast chiller cooling

Deliciousness kept up!

Tastefulness intact.  
And flavor also intact.

- Original flavors and colors preserved.
- Not dried out with the passage of time.
- Over cooking preventable.

Improved efficiency!

The cooling time is well known for efficient operation and scheduled production.

- The cooling time can be reduced for higher productivity.
- The core thermometer is ready to know the center temperature and cooling time.
- Blast chiller is essential for scheduled chilling and freezing of foodstuffs.

Higher food safety!

Cooked foodstuffs are rapidly cooled, skipping the bacteria-growing temperature zone. Safety and security of food is guaranteed.

- The bacteria-growing temperature range is passed fast for safe and secure food.
- Dropped bacteria and entry of insects and other foreign substances can be kept out.
- The core thermometer helps to control the cooling temperature and duration. Its reading appears on the display screen.

Blast Chiller 100V



Usable interior volume **111L**  
**QXF-005SFLT** **Single-Phase**  
● External dimensions : W750×D750(810)×H850mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food service trays (option)  
\* The inside temperature setting can be down to -40° C

Blast chiller/Shock freezer Table type 6



Usable interior volume **147L**  
**QXF-006SFLTA** **220-240V**  
● External dimensions : W1,200×D750(802)×H800mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food pan (option)

Blast chiller/Shock freezer Upright type 6



Usable interior volume **173L**  
**220-240V**  
**QXF-006SFLVA**  
(Vertical hotel pan set-up type)  
● External dimensions : W840×D880(932)×H1,465mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food pan (option)  
\* The hand shower can be optionally attached



Usable interior volume **147L**  
 **Three-Phase**  
**QXF-006SFSV3**  
(Horizontal hotel pan set-up type)  
● External dimensions : W770×D880(932)×H1,465mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food pan (option)  
\* The hand shower can be optionally attached

Blast chiller/Shock freezer Upright type 12



Usable interior volume **286L**  
**220-240V**  
**QXF-012SFLVA**  
(Vertical hotel pan set-up type)  
● External dimensions : W840×D880(932) ×H1,882mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food pan (option)  
\* The hand shower can be optionally attached



Usable interior volume **233L**  
 **Three-Phase**  
**QXF-012SFSV3**  
(Horizontal hotel pan set-up type)  
● External dimensions : W770×D880(932) ×H1,882mm  
\* Core temperature sensor L-type, with heater and cable  
\* Hotel food pan (option)  
\* The hand shower can be optionally attached



Equipped with inside self-cleaning function

Usable interior volume **286L**  
 **Three-Phase** **Order**  
**QXC-012SFLV3**  
(Vertical hotel pan set-up type)  
● External dimensions : W840×D880(932) ×H2,062mm  
\* Core temperature sensor L-type, with heater and cable  
\* One 2-liter bottle of dedicated detergent is included  
\* Hotel food pan (option)  
\* The water supply and drainage work is required

BLAST CHILLER/SHOCK FREEZER(Remote type)

Blast chiller/Shock freezer 20 type (Remote type \*Refrigerator is separately arranged.)



Refrigerant [R404A]  
Freezer (inverter) separately installed  
**QXF-020SFKSA** **Order**  
(Horizontal hotel pan set-up type)  
● Usable interior volume: 864L  
● External dimensions : W1,290×D940(1,061)×H2,250mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart

Refrigerant [R404A]  
Freezer (inverter) separately installed  
**QXF-020SFKL3** **Order**  
(Vertical hotel pan set-up type)  
● Usable interior volume: 648L  
● External dimensions : W1,120×D940(1,061)×H2,210mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart

Blast chiller/Shock freezer 24 type (Remote type \*Refrigerator is separately arranged.)



Refrigerant [R404A]  
Freezer (inverter) separately installed  
**QXF-024SFKSA** **Order**  
● Usable interior volume: 638L  
● External dimensions : W1,290×D1,080(1,201)×H1,775mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart

Blast chiller/Shock freezer 40 type (Remote type \*Refrigerator is separately arranged.)



Refrigerant [R404A]  
Freezer (inverter) separately installed  
**QXF-040SFKSA** **Order**  
● Usable interior volume: 1,123L  
● External dimensions : W1,290×D1,080(1,201)×H2,262mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart

Blast chiller/Shock freezer Cart type and equipped with automatic cleaning function (Remote type \*Refrigerator is separately arranged.)



Refrigerant [R-448A]  
Freezer (inverter) separately installed  
**QXC-040SFKS3** (40 type) **Order**  
**QXC-020SFKS3** (20 type) **Order**  
**QXC-020SFKL3** (20 type) **Order**  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart



Cart type and equipped with automatic cleaning function  
Dedicated detergent (2-liter bottle)

Blast chiller/Shock freezer 20 type Pass-through type (Remote type \*Refrigerator is separately arranged.)



Refrigerant [R-448A]  
Freezer (inverter) separately installed  
**QXF-020SFP53** **Order**  
● External dimensions : W1,500×D1,242×H2,315mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart



Refrigerant [R-448A]  
Freezer (inverter) separately installed  
**QXF-040SFP53** **Order**  
● External dimensions : W1,500×D1,442×H2,315mm  
\* Standard equipped with heater and straight core heat gauge (2 pieces)  
\* Hotel food pan (option)  
\* Trolley (option)  
\* The dimensions are different from cart to cart

FOOD PROCESSING MACHINE

Ice cooling storage cold-water system

- Optimum for running cold water over noodles and cleaning fresh fish and cut vegetables



JWWA certified

SWE-1000TA-PB1 **Three-Phase**  
● External dimensions :  
W680×D680×H1,438mm

Thawing Cabinet equipped with stepwise run function

Thawing run: 0 to 25°C  
Cold storage run: 0 to 10°C

**Three-Phase**  
**QDD-08DDMDX**  
(Upper chamber for thawing, lower chamber for thawing)  
● External dimensions :  
W755×D800×H1,950mm  
● Usable interior volume:  
Upper compartment : 235L  
Lower compartment : 232L

Thawing run: 2 to 25°C  
Cold storage run: 0 to 10°C

**Single-Phase**  
**QDN-06DDMX**  
(Half-tray type)  
● External dimensions :  
W610×D650×H1,950mm  
● Usable interior volume:  
Upper compartment : 161L  
Lower compartment: 158L

Thawing run: 2 to 25°C  
Cold storage run: 0 to 10°C

**Single-Phase**  
**QDW-09DMT1**  
(Horizontal type)  
● External dimensions :  
W900×D750×H800mm  
● Usable interior volume:173L

Bubbling water Thawing Sink

High Humidity Thawing Cabinet

Low-temperature dry box

**Three-Phase**  
**WBD-30MTA1** **Order**  
● External dimensions :  
W900×D750×H850mm  
● Usable interior volume:100L  
  
\*Drinking water is fed to the system. This means a water-feed faucet must be prepared

**Three-Phase**  
**QDM-130CM6** **Order**  
● External dimensions :  
W1,300×D798 (848)×H1,920 (2,060) mm  
● Usable interior volume:660L  
  
\*The clean thawing machine has been co-developed with Nippon Light Metal Co., Ltd.  
\*The water supply and drainage system is required

**Single-Phase**  
**QLD-080DM** **Order**  
● External dimensions :  
W770×D800×H890mm  
● Operating temperature range:  
Dry run: 3-10° C  
Cold-storage run at constant 3° C

PATISSERIE MACHINE

Patissier cooler for cakes and sweets

Preset temperature : - 40 to 10°C      French baking sheet 5 pieces

**Single-Phase**  
**QXF-005SFLT**  
● External dimensions :  
W750×D750 (810)×H850mm  
\*French baking sheet is optional

Blast chiller/shock freezer for patisserie /baking tray type

Preset temperature : - 40 to 10°C  
French baking sheet 12 pieces

**Three-Phase**  
**QFP-012SFLV3** **Order**  
● External dimensions :  
W840×D880 (932) ×H1,882mm  
\*French baking sheet is optional

Preset temperature : - 40 to 10°C  
French baking sheet 6 pieces

**Three-Phase**  
**QFP-006SFLT3** **Order**  
● External dimensions :  
W1,200×D750 (802)×H800mm  
\*French baking sheet is optional

Preset temperature : - 40 to 10°C  
French baking sheet 6 pieces

**Three-Phase**  
**QFP-006SFLV3** **Order**  
● External dimensions :  
W840×D880 (932) ×H1,465mm  
\*French baking sheet is optional

BAKERY MACHINE

Dough Conditioner (Independent control for 2 compartments)

Preset temperature : - 15 to 40°C / Setting humidity : 60 to 90%    When the inside of a warehouse is water temperature 25° C water supply pressure 0.2 - 0.4MPa in more than 0° C

6-section sheet or French baking sheet 36 pieces (18pieces×2)

**220-240V**  
**BDX-236ST**  
Storage room with lighting  
● External dimensions :  
W900×D950 (1,014)×H1,904mm  
\*Section sheet and French baking sheet is optional

6-section sheet or French baking sheet 36 pieces (18pieces×2)

**220-240V**  
**BDZ-236ST**  
Storage room with lighting  
● External dimensions :  
W770×D1,145 (1,209)×H1,904mm  
\*Section sheet and French baking sheet is optional

6-section sheet or French baking sheet 18 pieces (9pieces×2)

**Three-Phase**  
**BDX-218LT**  
● External dimensions :  
W620×D950 (1,014)×H1,904mm  
\*Section sheet and French baking sheet is optional  
\*Room light is optional

Dough Freezer(Storage of dough) Freezer / Thawing / Proofer

Preset temperature : - 30 to 5°C      Sheet for freezing 18 pieces

**Three-Phase**  
**BFX-118LT**  
● External dimensions :  
W620×D945 (976)×H1,905mm  
● Usable interior volume:538L  
\*Section sheet and French baking sheet is optional

Preset temperature : - 30 to 5°C      Sheet for freezing 36 pieces

**Three-Phase**  
**BFX-136LT** **Order**  
● External dimensions :  
W1,200×D945 (976)×H1,905mm  
● Usable interior volume:1,155L  
\*Section sheet and French baking sheet is optional

Proofer(Fermentation Chamber with refrigerating function)

Preset temperature : 0 to 40°C  
Setting humidity : 60 to 90%  
When the inside of a warehouse is water temperature 25° C water supply pressure 0.1 - 0.4MPa in more than 0° C

6-section sheet or French baking sheet 32 pieces

Best for low-temperature, long-time fermentation

**Three-Phase**  
**QBX-132HRST1** **Order**  
● External dimensions :  
W770×D945 (997)×H1,920mm  
● Usable interior volume:780L

Retarder(Frozen-dough thawing box)

Preset temperature : - 5 to 10°C

6-section sheet 40 pieces or French baking sheet 38 pieces

**Single-Phase**  
**BTX-140SS** **Order**  
**Three-Phase**  
**BTX-140ST** **Order**  
● External dimensions :  
W770×D945 (976)×H1,905mm  
● Usable interior volume:747L

Compact Dough Conditioner Freezer / Thawing / Proofer

Preset temperature : - 15 to 40°C Setting humidity : 60 to 90%  
When the inside of a warehouse is water temperature 25° C water supply pressure 0.2 - 0.4MPa in more than 0° C

6-section sheet or French baking sheet 12 pieces

**1-compartment control type**

**Single-Phase**  
**BDD-112SS** **Order**  
● External dimensions :  
W900×D800 (805)×H1,065 (1,100) mm  
● Usable interior volume:262L

8-section sheet (340×430×30mm) 12 pieces (Exclusive)

**1-compartment control type**

**Single-Phase**  
**BDN-112SS** **Order**  
● External dimensions :  
W775×D705 (710)×H1,065 (1,100) mm  
● Usable interior volume:171L

6-section sheet or French baking sheet 8 pieces (4pieces×2)

**2-compartment control type**

**Single-Phase**  
**BDD-208LS** **Order**  
● External dimensions :  
W700×D805 (810)×H1,063mm  
● Usable interior volume: 79L×2

Create an appealing sales floor with high-end design and performance.

- Low global warming potential refrigerant R448A (GWP:1390) adopted.
- Door rails detachable and easy to clean. Drainage also well configured.
- Standard equipped with quick-to-empty tank.



Humidity level retained over 90%\*  
\*Measured with our standards.



Crystal-clear double glass



LED lighting



Air deflector function

Patisserie showcase




PTR7530-1



PTR7524-1



PTR7518-1



\*Some models are shown here. Various colors, sheeting, covering, tiling and other options are available. Contact us for details.

Width (mm)	Model number	Power supply	Rated volume (L)	Width×Depth×Height (mm)	Weight (kg)	Power consumption(50/60Hz) (W)		Refrigerant
						Single-phase 100V	Three-phase 200V	
3,000	PTR7530-1	Single-Phase + Three-Phase	748	3,000×750×1,200	420	384	640	R448A
2,400	PTR7524-1	Single-Phase + Three-Phase	593	2,400×750×1,200	360	300	520	
2,100	PTR7521-1	Single-Phase + Three-Phase	516	2,100×750×1,200	320	300	458	
1,800	PTR7518-1	Single-Phase + Three-Phase	438	1,800×750×1,200	280	228	420	
1,500	PTR7515-1	Single-Phase + Three-Phase	360	1,500×750×1,200	240	228	350	
1,200	PTR7512-1	Single-Phase + Three-Phase	283	1,200×750×1,200	200	150	280	

CHILLER CABINET STOCKER

The Chiller Cabinet Stocker is best suited for online shopping, take-out orders and other delivery services from supermarkets, restaurants, etc. The semi-outdoor type has also hit the streets for under-the-awning setup.



Semi-outdoor type

Single-Phase

HSN-543SHBG

Control unit

●3-compartment dimensions : W540×D630×H1,905mm

Single-Phase

HSN-544SHBT

Wide-profile unit

●4-compartment dimensions : W540×D630×H1,905mm

Installable under the awning

Semi-outdoor type now on the market!

Waterproof design

The cabinet is provided with a top panel. The door bottom is slightly conical in front for waterproof performance. The suction opening of the machine compartment panel is also designed water-tight. The release key slot is covered.



Direct sunlight countermeasure

The 2D code reader section is appropriately tilted to protect itself against degradation due to direct sunlight.

Protection against ultraviolet rays

The touch panel is protectively covered against ultraviolet rays and for waterproofness.

Common for semi-outdoor type & indoor type

User-friendly features

- Applicable for frozen and chilled food
- Automatic door opening\*1
- Unit configuration for flexible number of units and control unit location\*2
- \*1 Just scan a 2D code or enter a passcode, and the door of the relevant compartment opens itself.
- \*2 Depending on combinations and connections.

FE clean water means sterile water that is generated by electrolysis of saline solution.(It is equivalent to diluted sodium hypochlorite.)

Features of safe“ FE clean water”

Easy to use

Just open the faucet, and the water is ready to use. There is no need to dilute the solution and control the concentration.

Plenty of generation

Just like tap water, you can use the water in large quantities.

Human- and eco-friendly

The safe water is almost free of chlorine smell and hardly irritating at all. Made of sodium chloride and water, the sterile solution is also environment-friendly.

Ready to wash out stains and smells

Stains and bacteria may cause smells. The water ensures the best odor eliminating effect.

No damage to foodstuffs

The water is neutral or mildly alkaline and does not affect foodstuffs. It is easy to rinse out too.

Low running cost

The generator needs sodium chloride, electricity and tap water. It is highly economical.

FES-12S [Simplified stand-alone type]



Setup image: Switch cock mountable on faucet (shown left), unit proper (center), salt tank (right)

FES-12S Single-Phase

●External dimensions :  
Body; W250×D210×H320mm  
Saline solution tank; W160×D160×H244mm

FES-08S [Simplified stand-alone type]



\*Equipped with accompanying anti-fall fixture



Setup image: Switch cock (shown left), unit proper (center), salt tank (right)

FES-08S Single-Phase

●External dimensions :  
Body; W250×D110×H335(310)mm  
Saline solution tank; W160×D160×H244mm  
\*Dimensions in parentheses is for mounting on a wall.

FES-12L [Stand-alone type]



FES-12L Single-Phase

●External dimensions :  
Body; W250×D210×H320mm  
Saline solution tank; W160×D160×H244mm

FES-12H [Stand-alone type]



FES-12H Single-Phase

●External dimensions :  
Body; W250×D210×H320mm  
Saline solution tank; φ315×H375mm

FE-1U-10000 [All-in-One type]



FE-1U-10000 Single-Phase

●External dimensions :  
W1,000×D600×H1,790mm

# RO WATER VENDING MACHINE

## Safer RO water products oriented to new and regular customers

The cutting-edge reverse osmosis membrane filtering system eliminates impurities maximally to produce safe drinking water. People get together around a RO water vending machine for socializing and connectedness.

### As much as 4 liters of water just in 30 seconds!

The water feed rate is higher than ever before. Such speedy performance shortens the time to wait and makes for smooth operation.

- **Standard type**  
Two-faucet water service type: 5 liters/min  
One-faucet water service type: 6 liters/min
- **High-power type**  
One-faucet water service type: 8 liters/min

## RO water filter machine

### Micro type

Measuring guideline  
100 liters/day supply type

4-liter tank incorporated

ROKS-01 [Order](#)

● External dimensions :  
W322×D354×H366mm

### Upright type

Measuring guideline  
1500 liters/day supply type

30-liter tank incorporated

ROKH-08T [Order](#)

● External dimensions :  
W600×D600×H1,800mm

ROKH-08T-M [Order](#)

● External dimensions :  
W600×D600×H1,800mm

### Double water outlets

ROVM-16WFR (Free type) [Order](#)

ROVM-16WCD (Card type) [Order](#)

● External dimensions :  
W1,000×D600×H1,790mm

### One water outlet / with wash basin

ROVM-08HFR (Free type) [Order](#)

ROVM-08HCD (Card type) [Order](#)

● External dimensions :  
W1,000×D600×H1,790mm

### One water outlet / Slim type

ROVM-08SFR (Free type) [Order](#)

ROVM-08SCD (Card type) [Order](#)

● External dimensions :  
W600×D600×H1,790mm

### One water outlet / Compact type

ROVM-03CFR (Free type) [Order](#)

ROVM-03CCD (Card type) [Order](#)

● External dimensions :  
W400×D500(+40)×H1,500mm

The compact type is available in colors: base white, deep blue and iron green. Select your favorite color.

Base white Deep blue Iron green

### Compact type

Measuring guideline  
100 liters/day supply type

30-liter tank incorporated

ROKL-01 [Order](#)

● External dimensions :  
W420×D600×H800mm  
\* A power supply does not have this model.

Measuring guideline  
750 liters/day supply type

ROKL-03 [Order](#)

● External dimensions :  
W300×D600×H800mm

# Getting Japan Quality across Asian Countries

## List of models compatible with multiple voltages

### Double door pass through refrigerator



### Udon dough let sit chamber

- The cooler and heater are controlled to create the optimal conditioning environment of udon dough.
- The forced-convection design allows less temperature fluctuations and quicker temperature rise in the chamber.



### High humidity constant temperature chamber with air duct wall cooling system

Keeping the freshness and deliciousness of foodstuff intact

#### Four-side cooling to keep the average humidity inside over 90%!

Air ducts are laid over four surfaces, and cold air is circulated through the ducts. The ducts are arranged on the ceiling, back and both sides for effective cooling. \* The inside temperature is set at 1°C. The effect depends on the type and condition of foodstuff as well as the operating conditions.



### Drawer table refrigerator



### Drawer table freezer



### Combination refrigerator with drawers



### Sandwich table refrigerator



### Sliding door refrigerator



### Cold table refrigerator with ingredient case



\* The hotel pan adapter bar is optional.

\* Forced cooling is adopted for the inside, and indirect cooling for the bottom of the ingredient case.

Standard models are shown here. They are also available in different dimensions. For more information, contact our sales staff.